

# Stationary concrete pump


# BSA 1005 D

Output up to 48 m<sup>3</sup>/h

Delivery pressure up to 85 bar



**Performance Diagram**


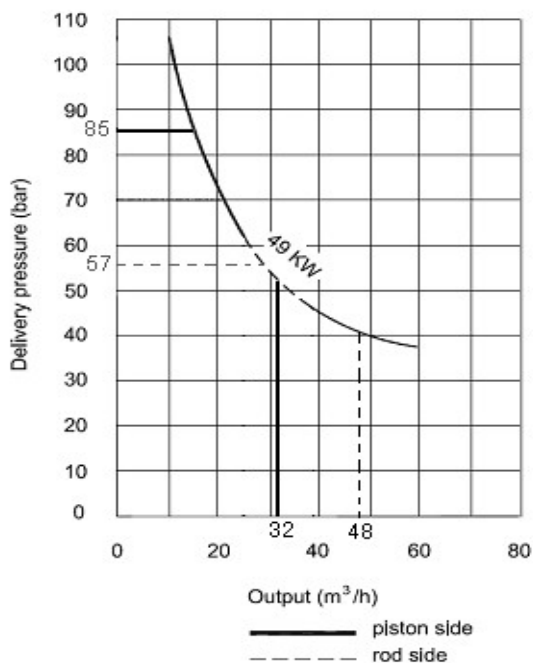


All data maximum theoretical

**Technical data for concrete pump**

Model		BSA 1005 D
Output	m <sup>3</sup> /h	48/32*
Delivery pressure	bar	57/85*
Delivery cylinder diameter	mm	200
Delivery cyl. stroke	mm	1000
Strokes / minute		26/17*
Engine power	kW	49
Hopper		RS 905A
Capacity	l	aprox. 600
Filling height	m	1.3
Transfer tube		S 2018 PN
Flap straight diameter	mm	150
Control system		OPS
Weight	Kg	3500

\* Values for hydraulic fluid being fed to piston side

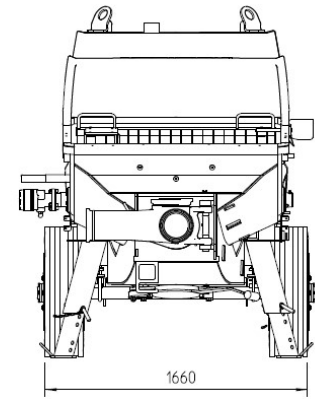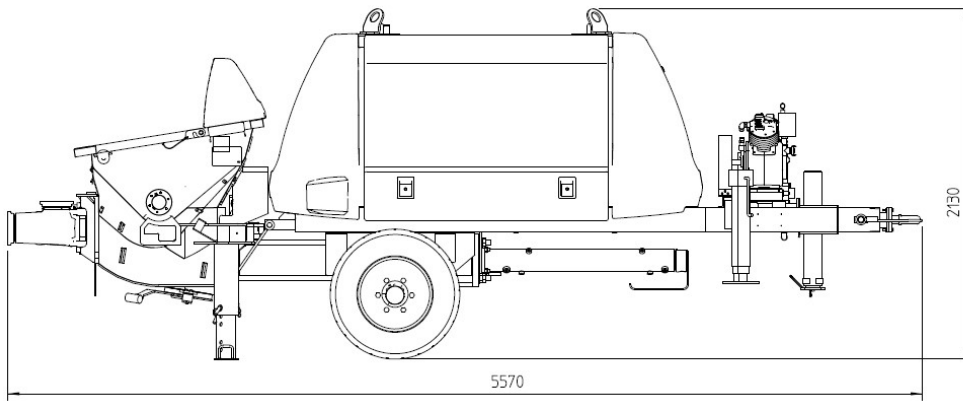

## Scope of supply

Drive diesel engine, Deutz, F04L0912, 49KW, Air cooled

Square outriggers 3 Nos - (2 x mech. 15° slanting and 1 x straight)

Hopper with agitator

Operating manuals and spare part lists 2x

Trailer F 8, travelling on site

Central lubrication strip hopper

Grille 70 mm

Splash guard

Mechanical jack with tow bar

Cast wear parts, highly wear resistant

Chrome delivery cylinder

Single agitator motor

Electronic control with full color display and information

Reducer kit, consisting of -reducer 6" - 5 1/2" - 1200mm including 6" coupling and seal

RSA- Grill Safety



## Optional

Flushing water pump, 22 bar, easy for operation

SBU

Auto Greasing system

Connection kit for connecting alternative pipelines, consisting of:

-PM weld on ring 5 1/2 "

-PM clamp coupling 5 1/2 "

-PM seal 5 1/2 "

Compressor 7.5 HP, Max. working pressure 12bar, Anest Iwata, BLT75-14S1

Drive diesel engine, Kirloskar, HA494 , 49KW, Air cooled

Drive diesel engine, Deutz, 53.0KW/2300 F04L0914 24V tier-2, Air cooled

See quotation for exact serial delivery scope .  
Comprehensive range of options available on request .